# Luxury
# Massage Bathtub

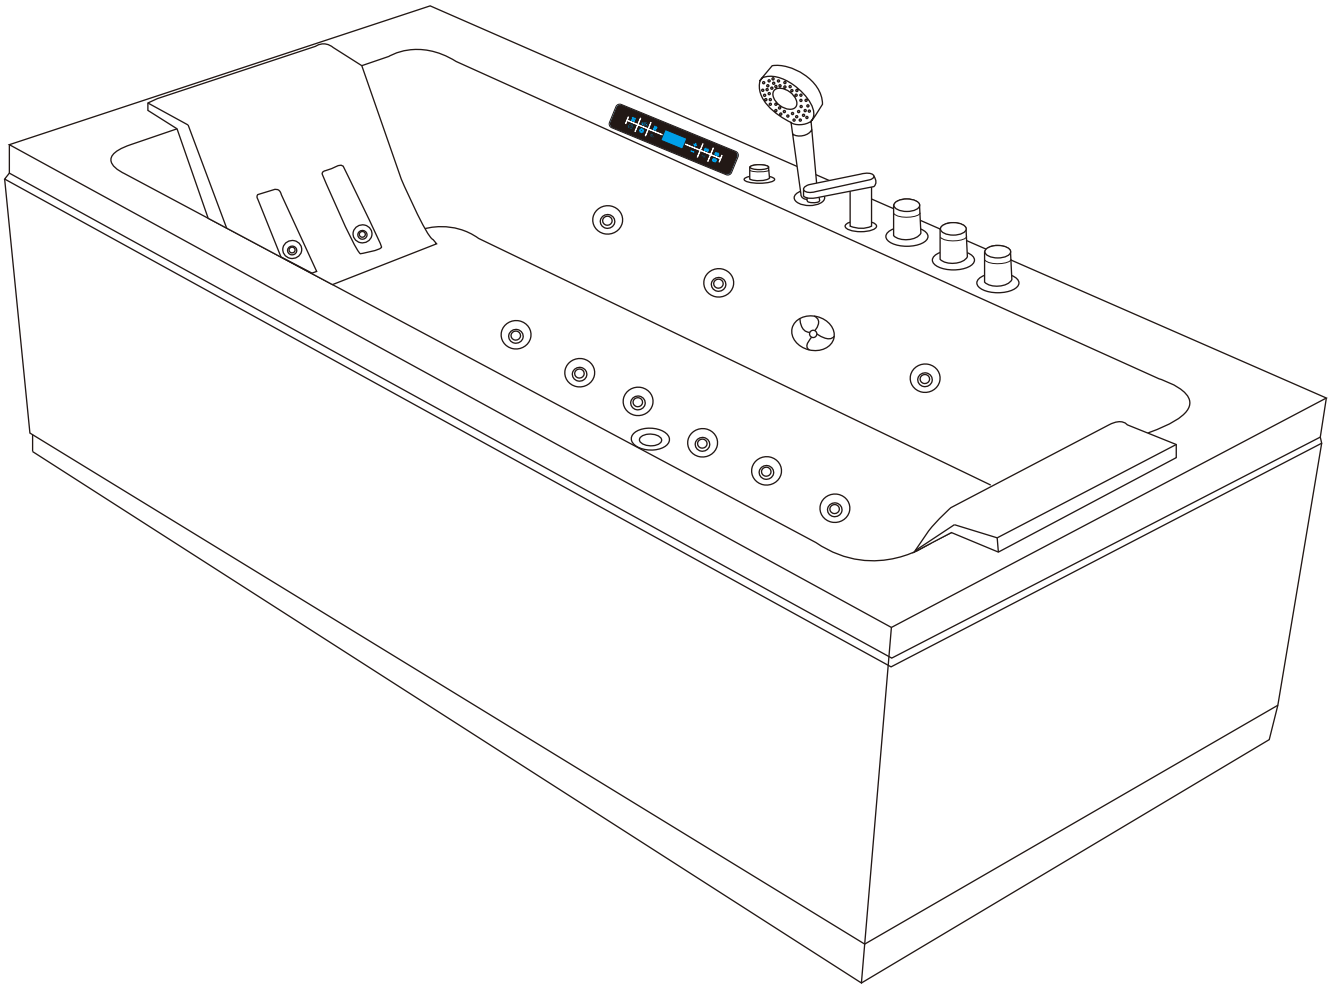

## DELOS

1600x750x580mm

1700x800x580mm

1850x900x620mm

# Functional Introduction

1.Computer panel
2.Switch for speed 3.Hand shower
4.Faucet 5.Switch for hand shower & faucet
6.Cool water 7.Hot water

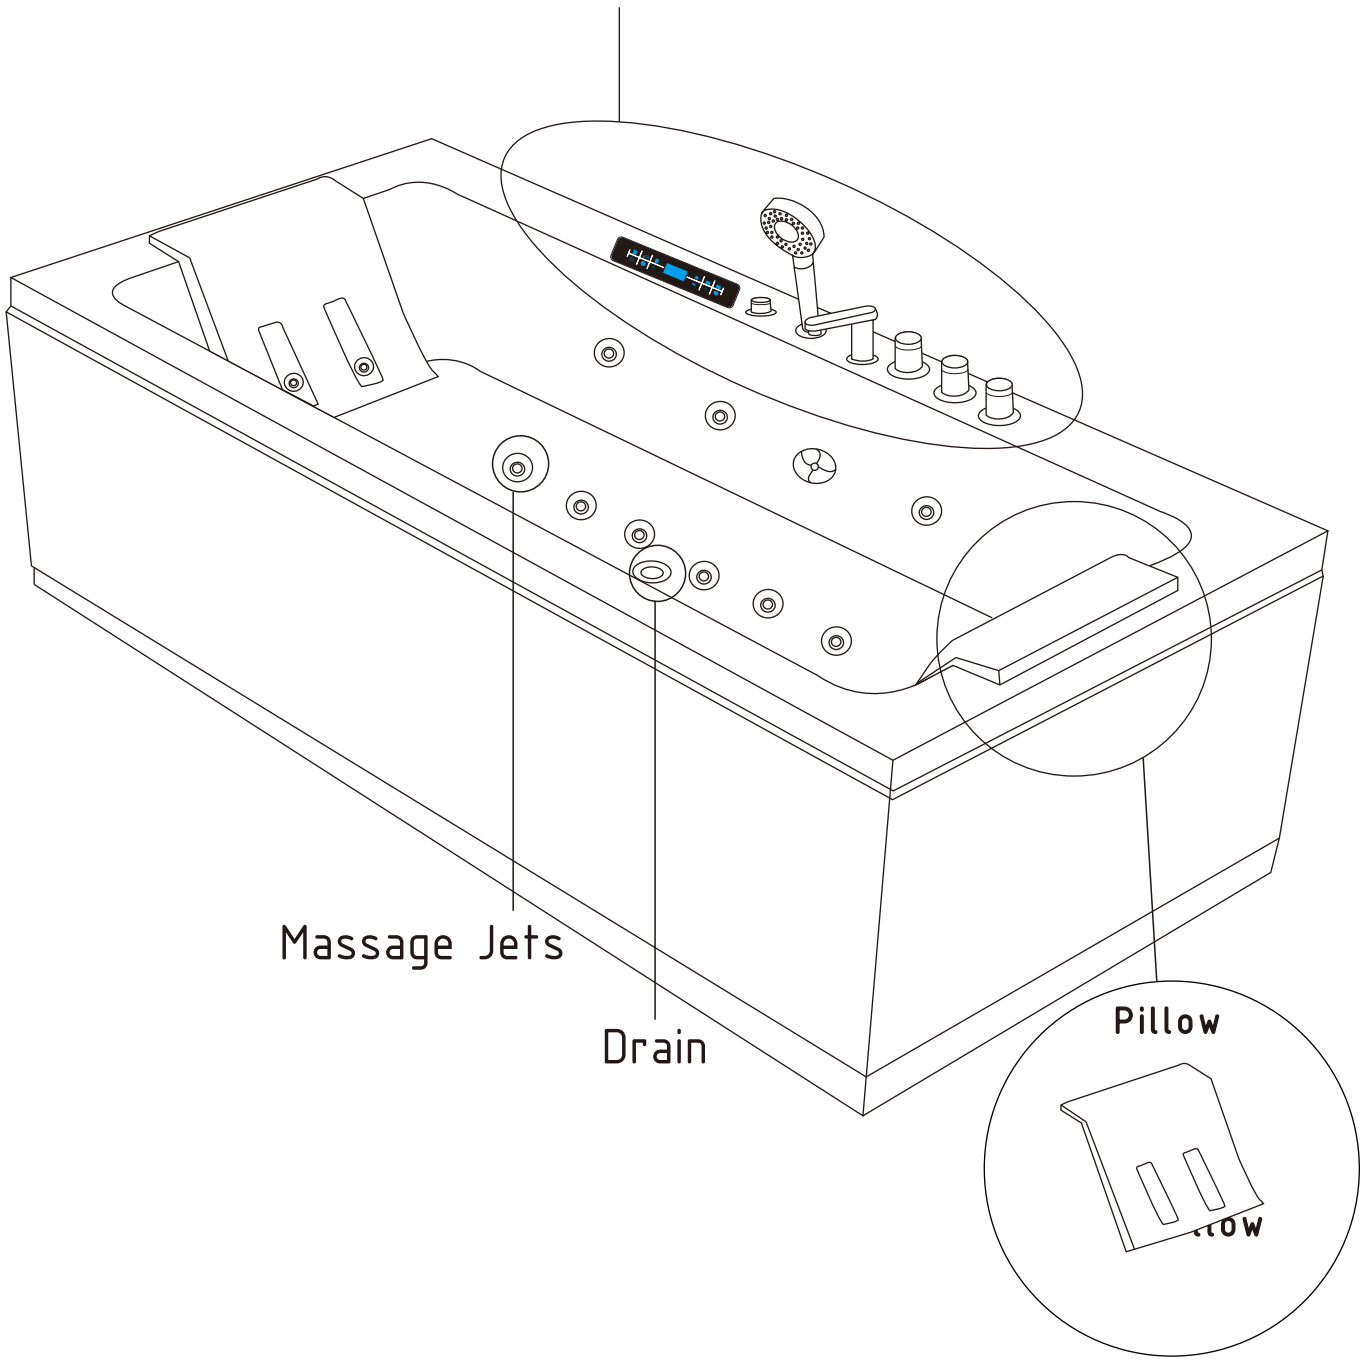

# Water & Electricity Position Design

Length unit: mm

1600x750x580mm

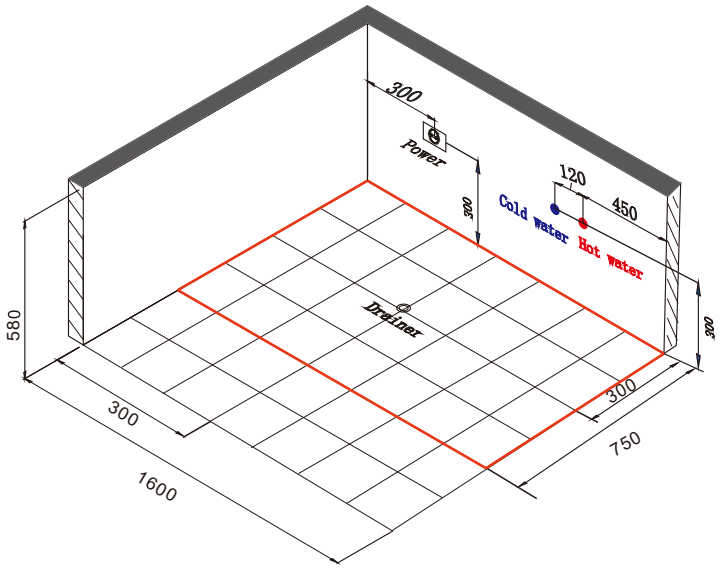


1700x800x580mm

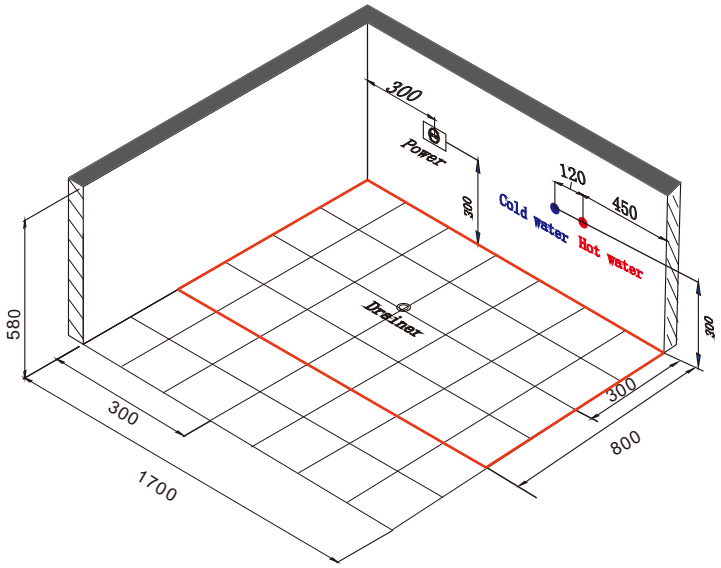


1850x900x620mm

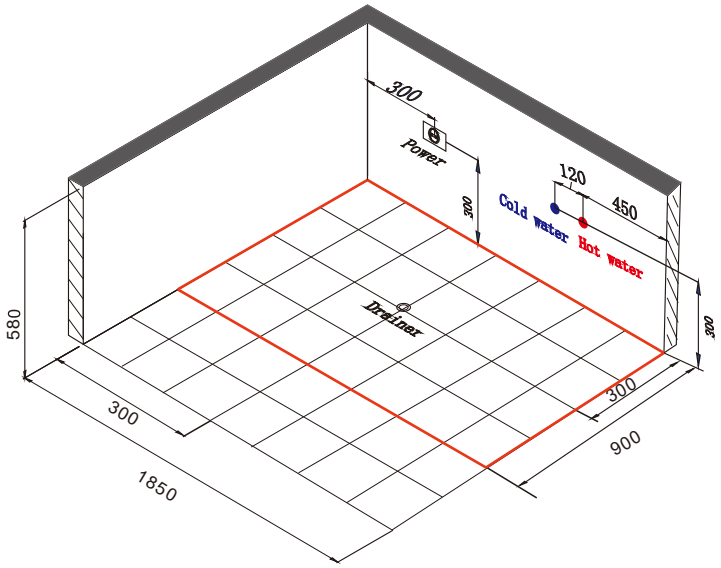

# Power Request

**DXD** PUMP

MODEL DXD-315 E AC 220-240V 50Hz 1125W CLASS F IPX5

MAX WATER TEMPERATURE 50℃ 15u F/450V Hmin 1m

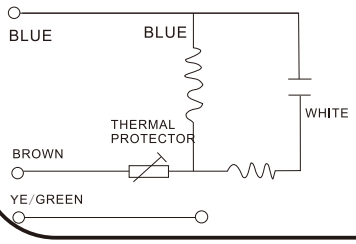


Ground properly!
Do Not Start Pump
Without Water!



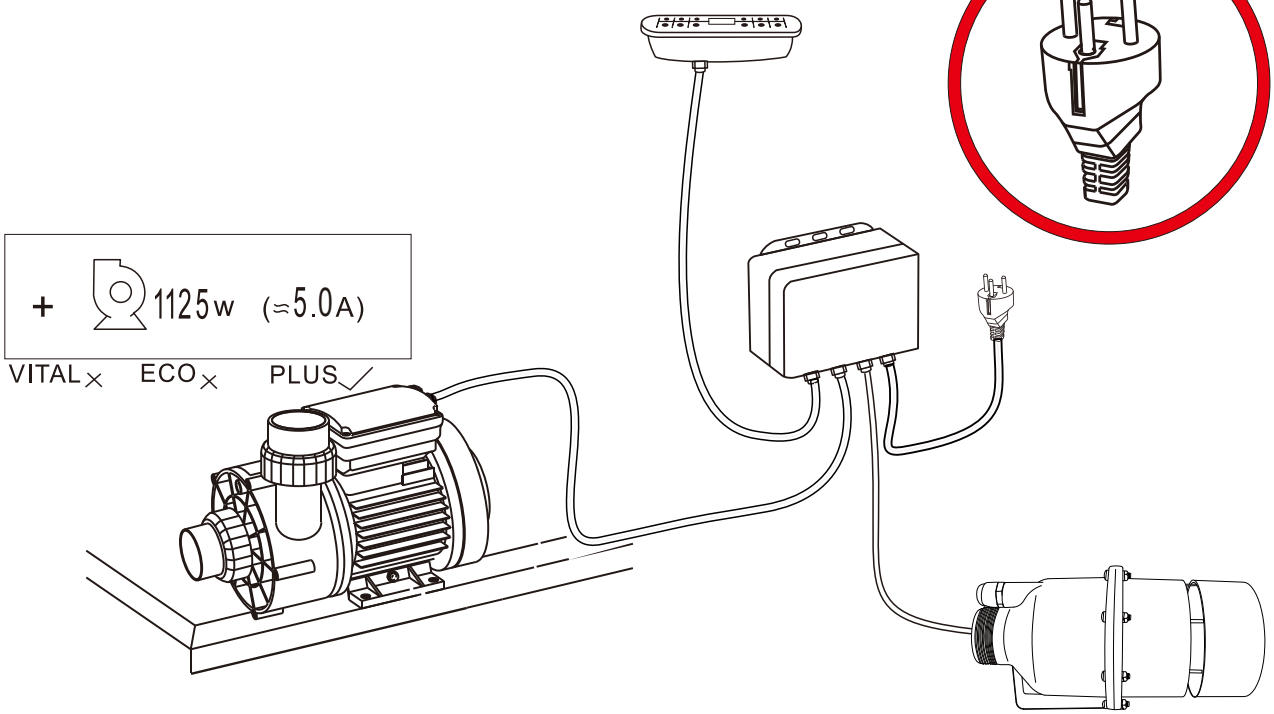


**DXD** AIR PUMP

MODEL DXD-6E-350 220-240V 50HZ/60HZ 350W

S1 CLASS 155(F)

IP X5

BAR CODE:

# Accessories Installation

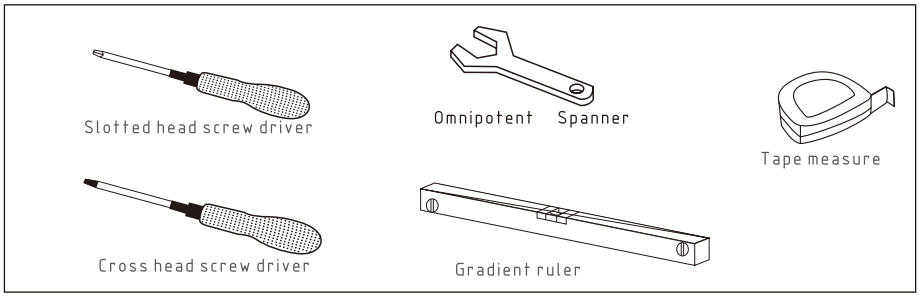


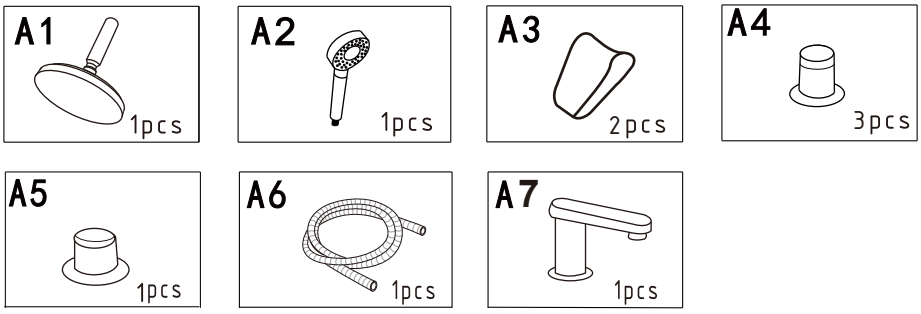


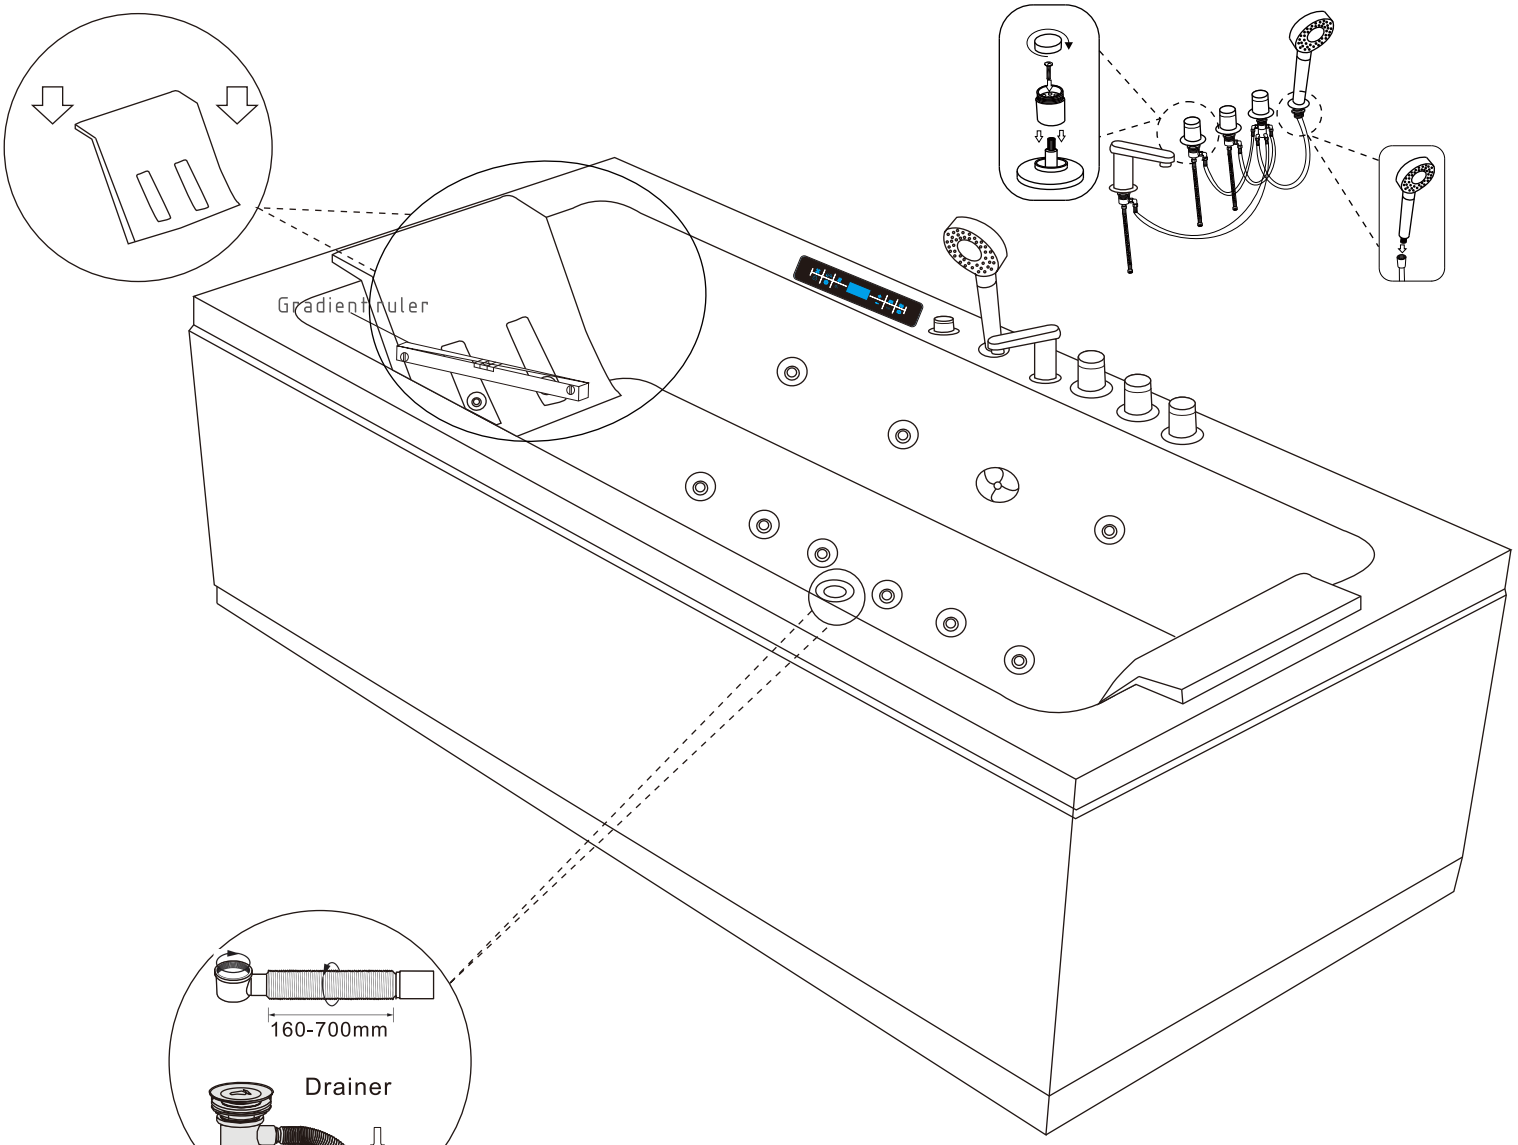

# Functional Instructions

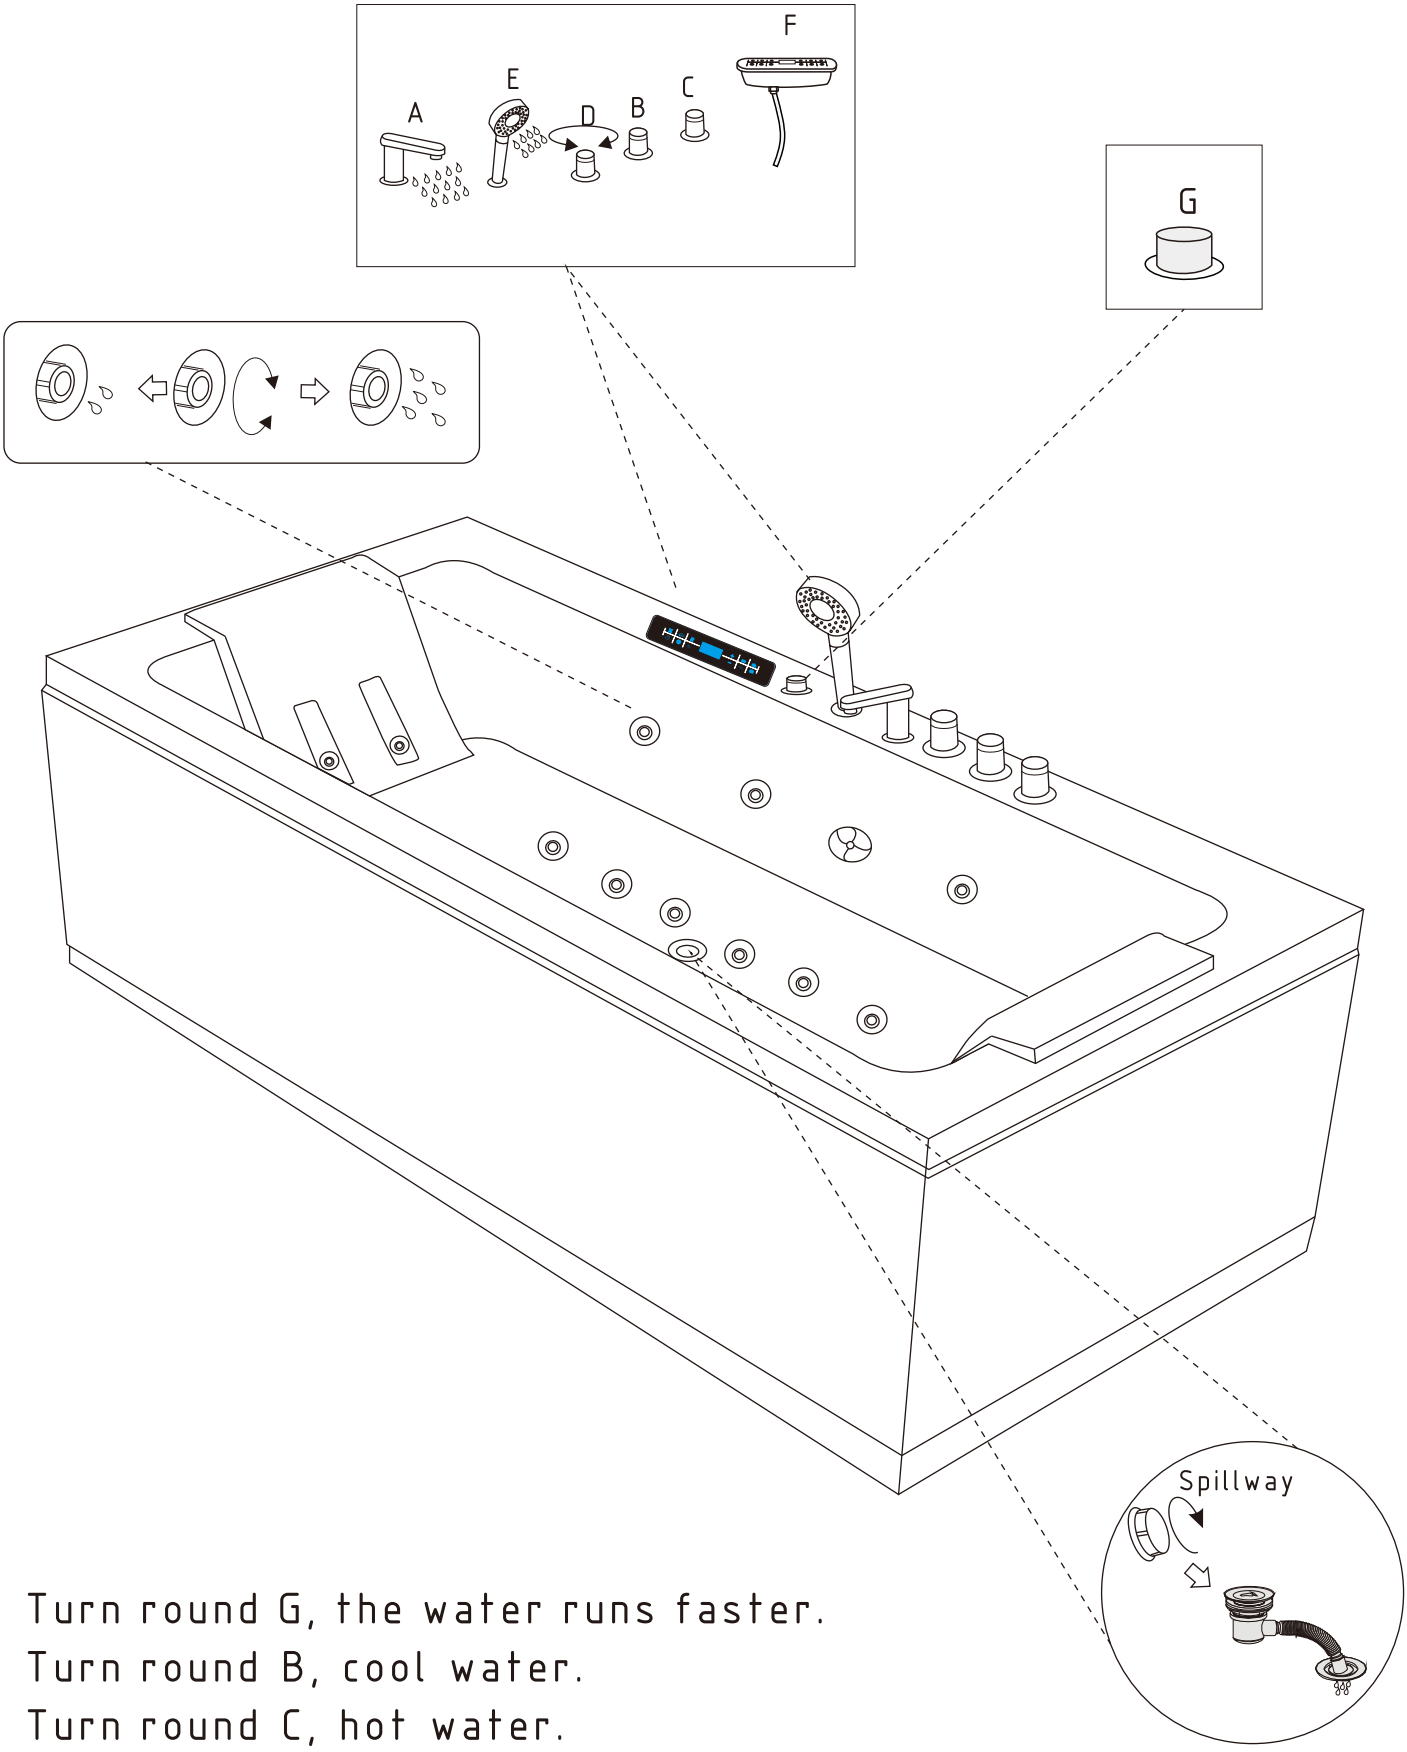


Turn round G, the water runs faster.
Turn round B, cool water.
Turn round C, hot water.
Turn round D, water comes from A or E.

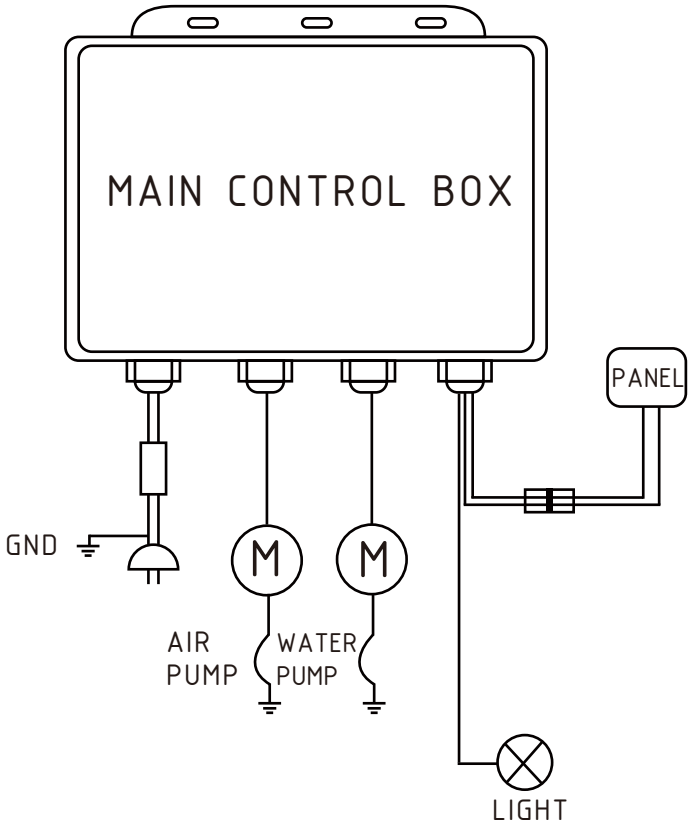


## Schematic diagram of the panel

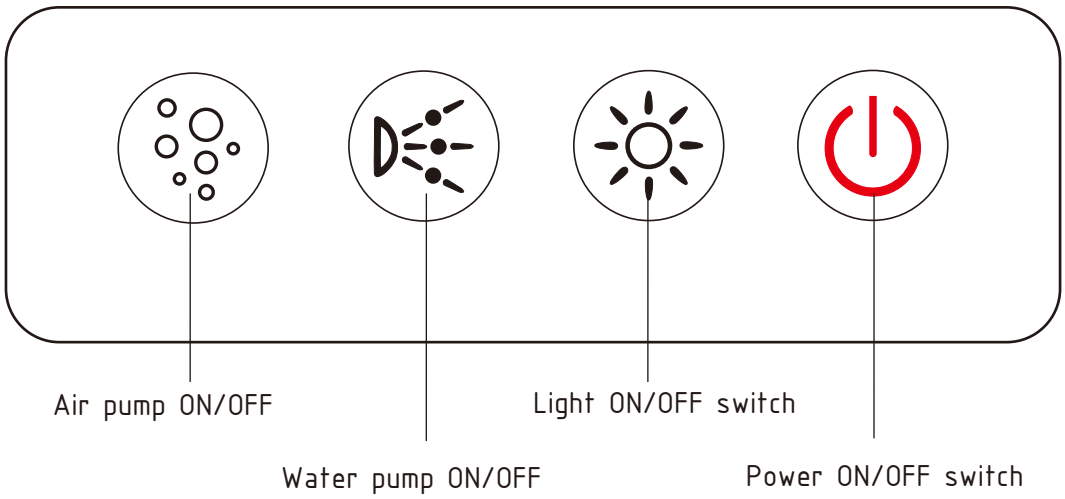


## Operation instruction and direction

Push down the switch,the controller is open,its status light ison,and other function can be used only when power is ON.

Push down the button,the Water pump is on;
repeat theoperation,it is off.

Push down the button,the Air pump is on;
repeat theoperation,it is off.

Push down the button,the Light is on ;
repeat the operation,it isoff.

Notice:their status lights are on when you press the buttononce,and their lights are off when the functions stop running.When there is no enough water,please don't open the function ofwater pump.

## Run Environment

①POWER:AC220V ②pump/WIND PUMP: AC220V ③LIGHT:AC12V

## Notes of user

①Please read the instruction carefully when install the product, so that you can do it effectively in time.

②User should pay attention to the high-voltage on productsmarked signs,Not to touch their locations, ensure personalsafety;

③Don't expose the controller to the moist or high temperature environment to prevent fire or electric shock.
Please towel thecontroller after using it.

④Please keep water clean,no solid debris left.Otherwise,it will jam the backwater and the pipeline,resulting in damagingthe equipment or fittings.lf jam happened, please turn off thepower to clean stems immediately,then restart it.

⑤Please do not pull any of the output lines, not beat or throw the equipment at random,Otherwise crusts or inner parts will be broken.

⑥ Don't open the cover of the controller for there are dangerous parts in allowed for maintenance it.Only qualifiedservicemen are allowed for maintenance.

⑦ The used power supply must be in line with the specified voltage value shown on the controllerotherwise it is not allowed to be used even burns out the controller burns out the controller.

⑧ The intervals of continuous power on and off must be over 30s for extending the use life of the controller.

⑨ Please do not plug or pull the control panel with electricity, otherwise the devices will be damaged or unusual conditions will appear.At the moment,turn off the power in seconds, restart it.

⑩ Please insert fittings(such as:light,speaker,valve,ozone sterilization,water pump,wind pump,steam generator,etc.) lnto corresponding output ports of equipment correctly, otherwise they will be damaged in order to cause danger.

## Solutions of basic problems

① Q:Why dose not water pump,run?
A:Firstly,Please check whether there is a equipment with waterlevel,if so,please check whether the water sensor contact with water is good,if not,please stop using it,then you can contact with my company staff.

① Q:Press lights,ozone,speakers,fan,air-conditioning andother functions,but why don't they start to run?
A:First,check whether the plug-in terminals contacts with each other well;if lights and ozone sterilization still fails to run,please turn on the fuse and ensure if it has blew out, which cutoff the whole system and stop running.